



Message Implementation Guideline

## **RequestForQuotation**

Model: REQOTE\_xCBL\_3\_5  
Version: 1.0  
Issue date: 03.06.2024  
Author: Würth Industry

## Structure

Occurrence	Element/Attribute
------------	-------------------

	<b>RequestForQuotation</b>
1 .. 1	xs:sequence
1 .. 1	<b>RequestQuoteHeader</b>
1 .. 1	xs:sequence
1 .. 1	<b>RequestQuoteID</b>
1 .. 1	<b>RequestQuoteIssueDate</b>
0 .. 1	<b>RequestForQuotationReferences</b>
1 .. 1	xs:sequence
0 .. 1	<b>OtherRequestQuoteReferences</b>
1 .. 1	xs:sequence
1 .. 1	<b>ReferenceCoded</b>
1 .. 1	xs:sequence
1 .. 1	<b>ReferenceTypeCoded</b>
1 .. 1	<b>PrimaryReference</b>
1 .. 1	xs:sequence
1 .. 1	<b>RefNum</b>
0 .. 1	<b>Purpose</b>
1 .. 1	xs:sequence
1 .. 1	<b>RequestQuotePurposeCoded</b>
0 .. 1	<b>RequestQuotePurposeCodedOther</b>
0 .. 1	<b>RequestQuoteDates</b>
1 .. 1	xs:sequence
1 .. 1	<b>RequestQuoteValidityDate</b>
1 .. 1	xs:sequence
1 .. 1	<b>StartDate</b>
1 .. 1	<b>EndDate</b>
1 .. 1	<b>QuoteParty</b>
1 .. 1	xs:sequence
1 .. 1	<b>BuyerParty</b>
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	<b>PartyID</b>
1 .. 1	xs:sequence
0 .. 1	<b>Agency</b>
1 .. 1	xs:sequence
1 .. 1	<b>AgencyCoded</b>
1 .. 1	<b>Ident</b>
0 .. 1	<b>NameAddress</b>
1 .. 1	xs:sequence
1 .. 1	<b>Name1</b>
0 .. 1	<b>PrimaryContact</b>
1 .. 1	xs:sequence
1 .. 1	<b>ContactName</b>
0 .. 1	<b>ListOfContactNumber</b>
1 .. 1	xs:sequence
1 .. 3	<b>ContactNumber</b>
1 .. 1	xs:sequence
1 .. 1	<b>ContactNumberValue</b>
1 .. 1	<b>ContactNumberTypeCoded</b>
	<b>SellerParty</b>

Bold = Simple Element, Bold on grey background = Complex Element, Italic = Attribute, Grey = Group

Occurrence	Element/Attribute
1 .. 1	
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	<b>PartyID</b>
1 .. 1	xs:sequence
0 .. 1	<b>Agency</b>
1 .. 1	xs:sequence
1 .. 1	<b>AgencyCoded</b>
1 .. 1	<b>Ident</b>
0 .. 1	<b>QuoteCurrency</b>
1 .. 1	xs:sequence
1 .. 1	<b>CurrencyCoded</b>
0 .. 1	<b>PaymentInstructions</b>
1 .. 1	xs:sequence
0 .. 1	<b>PaymentTerms</b>
1 .. 1	xs:sequence
1 .. 1	<b>PaymentTerm</b>
1 .. 1	xs:sequence
1 .. 1	<b>PaymentTermCoded</b>
0 .. 1	<b>PaymentTermsNote</b>
0 .. 1	<b>TermsOfDelivery</b>
1 .. 1	xs:sequence
1 .. 1	<b>TermsOfDeliveryFunctionCoded</b>
0 .. 1	<b>TransportTermsCodedOther</b>
1 .. 1	<b>ShipmentMethodOfPaymentCoded</b>
0 .. 1	<b>Language</b>
1 .. 1	xs:sequence
1 .. 1	<b>LanguageCoded</b>
0 .. 99	<b>RequestQuoteHeaderNotes</b>
1 .. 1	<b>RequestQuoteDetail</b>
1 .. 1	xs:sequence
0 .. 1	<b>ListOfRequestQuoteItemDetail</b>
1 .. 1	xs:sequence
1 .. 999	<b>RequestQuoteItemDetail</b>
1 .. 1	xs:sequence
1 .. 1	<b>RequestQuoteBaseItemDetail</b>
1 .. 1	xs:sequence
1 .. 1	<b>LineItemNum</b>
1 .. 1	xs:sequence
1 .. 1	<b>BuyerLineItemNum</b>
0 .. 1	<b>ItemIdentifiers</b>
1 .. 1	xs:sequence
0 .. 1	<b>PartNumbers</b>
1 .. 1	xs:sequence
0 .. 1	<b>SellerPartNumber</b>
1 .. 1	xs:sequence
1 .. 1	<b>PartID</b>
0 .. 1	<b>BuyerPartNumber</b>
1 .. 1	xs:sequence
1 .. 1	<b>PartID</b>
0 .. 1	<b>OtherItemIdentifiers</b>
	xs:sequence

Bold = Simple Element, Bold on grey background = Complex Element, Italic = Attribute, Grey = Group

Occurrence	Element/Attribute
1 .. 1	
<b>1 .. 1</b>	<b>ProductIdentifierCoded</b>
1 .. 1	xs:sequence
1 .. 1	<b>ProductIdentifierQualifierCoded</b>
0 .. 1	<b>ProductIdentifierQualifierCodedOther</b>
0 .. 1	<b>ProductIdentifierExt</b>
0 .. 1	<b>ItemDescription</b>
<b>0 .. 1</b>	<b>TotalQuantity</b>
1 .. 1	xs:sequence
1 .. 1	xs:sequence
0 .. 1	xs:choice
1 .. 1	<b>QuantityValue</b>
<b>0 .. 1</b>	<b>UnitOfMeasurement</b>
1 .. 1	xs:sequence
1 .. 1	<b>UOMCoded</b>
1 .. 1	<b>UOMCodedOther</b>
1 .. 1	xs:sequence
1 .. 1	<b>QuantityQualifierCoded</b>
<b>0 .. 1</b>	<b>ListOfQuantityCoded</b>
1 .. 1	xs:sequence
<b>1 .. 1</b>	<b>QuantityCoded</b>
1 .. 1	xs:sequence
1 .. 1	xs:sequence
1 .. 1	xs:choice
1 .. 1	<b>QuantityValue</b>
<b>1 .. 1</b>	<b>UnitOfMeasurement</b>
1 .. 1	xs:sequence
1 .. 1	<b>UOMCoded</b>
1 .. 1	<b>UOMCodedOther</b>
1 .. 1	xs:sequence
1 .. 1	<b>QuantityQualifierCoded</b>
0 .. 99	<b>LineItemNote</b>
<b>1 .. 1</b>	<b>ListOfAttachment</b>
1 .. 1	xs:sequence
<b>1 .. 10</b>	<b>Attachment</b>
1 .. 1	xs:sequence
0 .. 1	<b>FileName</b>

Bold = Simple Element, Bold on grey background = Complex Element, Italic = Attribute, Grey = Group

## Guideline

Element/Attribute	Annotation	
<b>RequestForQuotation</b>	Type	RequestForQuotation
xs:sequence	Occurrence	1 .. 1
<b>RequestQuoteHeader</b>	Occurrence	1 .. 1
	Description	Holds all RequestForQuotation header-level information.
xs:sequence	Occurrence	1 .. 1
<b>RequestQuoteID</b>	Occurrence	1 .. 1
	Type	xs:string
	Description	Contains a reference number to identify the request document.
<b>RequestQuoteIssueDate</b>	Occurrence	1 .. 1
	Type	xs:dateTime
	Description	CCYY-MM-DDT+hh:mm:ss+02:00
<b>RequestForQuotationReferences</b>	Occurrence	0 .. 1
	Description	Contains the collective number for quotations.
xs:sequence	Occurrence	1 .. 1
<b>OtherRequestQuoteReferences</b>	Occurrence	0 .. 1
	Type	OtherRequestQuoteReferences
xs:sequence	Occurrence	1 .. 1
<b>ReferenceCoded</b>	Occurrence	1 .. 1
xs:sequence	Occurrence	1 .. 1
<b>ReferenceTypeCoded</b>	Occurrence	1 .. 1
	Type	xs:string
	Description	Used code: SubmissionNumber
<b>PrimaryReference</b>	Occurrence	1 .. 1
	Type	AccountNumber
xs:sequence	Occurrence	1 .. 1
<b>RefNum</b>	Occurrence	1 .. 1
	Type	xs:string
	Description	Collective number for quotations
<b>Purpose</b>	Occurrence	0 .. 1
	Description	Indicates the request for quotation type.
xs:sequence	Occurrence	1 .. 1
<b>RequestQuotePurposeCoded</b>	Occurrence	1 .. 1
	Type	xs:string
<b>RequestQuotePurposeCodedOther</b>	Occurrence	0 .. 1
	Type	xs:string
	Description	Used Codes: ZA, ZAED, ZAFP, ZAN, ZANK, ZWL In case of consignment: ZA2, ZAED2, ZAFP2, ZAN2, ZANK2, ZWL2 ZA[2] = RFQ Equipments ZAED[2] = RFQ Repair Service ZAFP[2] = RFQ Project ZAN[2] = RFQ Trading goods ZANK[2] = RFQ Contract ZWL[2] = RFQ WLW
<b>RequestQuoteDates</b>	Occurrence	0 .. 1
xs:sequence	Occurrence	1 .. 1
<b>RequestQuoteValidityDate</b>	Occurrence	1 .. 1
	Type	ValidityDates
	Description	Specifies the dates for which the contract is effective.
xs:sequence	Occurrence	1 .. 1
<b>StartDate</b>	Occurrence	1 .. 1
	Type	xs:dateTime
	Description	not filled
<b>EndDate</b>	Occurrence	1 .. 1
	Type	xs:dateTime
	Description	Deadline for submission of quotations.
<b>QuoteParty</b>	Occurrence	1 .. 1

Bold = Element, Italic = Attribute, Grey = Group

Element/Attribute	Annotation
xs:sequence	Occurrence 1 .. 1
<b>BuyerParty</b>	Occurrence 1 .. 1 Type BuyerParty
xs:sequence	Occurrence 1 .. 1
xs:sequence	Occurrence 1 .. 1
<b>PartyID</b>	Occurrence 1 .. 1 Type ContractID
xs:sequence	Occurrence 1 .. 1
<b>Agency</b>	Occurrence 0 .. 1 Type Agency
xs:sequence	Occurrence 1 .. 1
<b>AgencyCoded</b>	Occurrence 1 .. 1 Type xs:string Description Used code: Auftraggeber
<b>Ident</b>	Occurrence 1 .. 1 Type xs:string Description Holds the identification number assigned by the Buyer.
<b>NameAddress</b>	Occurrence 0 .. 1 Type NameAddress
xs:sequence	Occurrence 1 .. 1
<b>Name1</b>	Occurrence 1 .. 1 Type xs:string Description Contains the name of an entity.
<b>PrimaryContact</b>	Occurrence 0 .. 1 Type PrimaryContact Description Identifies the main contact and contact information for this party.
xs:sequence	Occurrence 1 .. 1
<b>ContactName</b>	Occurrence 1 .. 1 Type xs:string
<b>ListOfContactNumber</b>	Occurrence 0 .. 1
xs:sequence	Occurrence 1 .. 1
<b>ContactNumber</b>	Occurrence 1 .. 3
xs:sequence	Occurrence 1 .. 1
<b>ContactNumberValue</b>	Occurrence 1 .. 1 Type xs:string
<b>ContactNumberTypeCoded</b>	Occurrence 1 .. 1 Type xs:string Description Used codes: EmailAddress, FaxNumber, TelephoneNumber
<b>SellerParty</b>	Occurrence 1 .. 1 Type BuyerParty
xs:sequence	Occurrence 1 .. 1
xs:sequence	Occurrence 1 .. 1
<b>PartyID</b>	Occurrence 1 .. 1 Type ContractID
xs:sequence	Occurrence 1 .. 1
<b>Agency</b>	Occurrence 0 .. 1 Type Agency
xs:sequence	Occurrence 1 .. 1
<b>AgencyCoded</b>	Occurrence 1 .. 1 Type xs:string Description Used code: Lieferant
<b>Ident</b>	Occurrence 1 .. 1 Type xs:string Description Holds the identification number assigned by the buyer.
<b>QuoteCurrency</b>	Occurrence 0 .. 1 Type QuoteCurrency
xs:sequence	Occurrence 1 .. 1

Bold = Element, Italic = Attribute, Grey = Group

Element/Attribute		Annotation	
└─ CurrencyCoded	Occurrence	1 .. 1	
	Type	xs:string	
	Description	ISO 4217 3-Alpha Code	
└─ PaymentInstructions	Occurrence	0 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ PaymentTerms	Occurrence	0 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ PaymentTerm	Occurrence	1 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ PaymentTermCoded	Occurrence	1 .. 1	
	Type	xs:string	
└─ PaymentTermsNote	Occurrence	0 .. 1	
	Type	xs:string	
	Description	Contains a note to further describe the payment terms.	
└─ TermsOfDelivery	Occurrence	0 .. 1	
	Type	TermsOfDelivery	
└─ xs:sequence	Occurrence	1 .. 1	
└─ TermsOfDeliveryFunctionCoded	Occurrence	1 .. 1	
	Type	xs:string	
	Description	Used code: DeliveryCondition	
└─ TransportTermsCodedOther	Occurrence	0 .. 1	
	Type	xs:string	
	Description	Incoterms code + text E.g. DDP Bad Mergentheim	
└─ ShipmentMethodOfPaymentCoded	Occurrence	1 .. 1	
	Type	xs:string	
	Description	not filled	
└─ Language	Occurrence	0 .. 1	
	Type	CorrespondenceLanguage	
	Description	Identifies the language of the quotation.	
└─ xs:sequence	Occurrence	1 .. 1	
└─ LanguageCoded	Occurrence	1 .. 1	
	Type	xs:string	
	Description	ISO 3166 2-Alpha Code	
└─ RequestQuoteHeaderNotes	Occurrence	0 .. 99	
	Type	xs:string	
	Description	Contains general instructions for the RequestForQuotation.	
└─ RequestQuoteDetail	Occurrence	1 .. 1	
	Description	Contains the line level and packaging detail information for the RequestForQuotation.	
└─ xs:sequence	Occurrence	1 .. 1	
└─ ListOfRequestQuoteItemDetail	Occurrence	0 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ RequestQuoteItemDetail	Occurrence	1 .. 999	
└─ xs:sequence	Occurrence	1 .. 1	
└─ RequestQuoteBaseItemDetail	Occurrence	1 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ LineItemNum	Occurrence	1 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ BuyerLineItemNum	Occurrence	1 .. 1	
	Type	xs:decimal	
└─ ItemIdentifiers	Occurrence	0 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ PartNumbers	Occurrence	0 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ SellerPartNumber	Occurrence	0 .. 1	
	Type	SellerPartNumber	
└─ xs:sequence	Occurrence	1 .. 1	

Bold = Element, Italic = Attribute, Grey = Group

Element/Attribute		Annotation	
└─ <b>PartID</b>	Occurrence	1 .. 1	
	Type	xs:string	
└─ <b>BuyerPartNumber</b>	Occurrence	0 .. 1	
	Type	SellerPartNumber	
└─ xs:sequence	Occurrence	1 .. 1	
└─ <b>PartID</b>	Occurrence	1 .. 1	
	Type	xs:string	
└─ <b>OtherItemIdentifiers</b>	Occurrence	0 .. 1	
	Type	SubstitutePartNumbers	
└─ xs:sequence	Occurrence	1 .. 1	
└─ <b>ProductIdentifierCoded</b>	Occurrence	1 .. 1	
	Type	StandardPartNumber	
└─ xs:sequence	Occurrence	1 .. 1	
└─ <b>ProductIdentifierQualifierCoded</b>	Occurrence	1 .. 1	
	Type	xs:string	
	Description	Used code: Other	
└─ <b>ProductIdentifierQualifierCodedOther</b>	Occurrence	0 .. 1	
	Type	xs:string	
	Description	Used code: Packing	
└─ <b>ProductIdentifierExt</b>	Occurrence	0 .. 1	
	Type	xs:string	
	Description	Package size	
└─ <b>ItemDescription</b>	Occurrence	0 .. 1	
	Type	xs:string	
└─ <b>TotalQuantity</b>	Occurrence	0 .. 1	
	Type	BasisQuantityRange	
└─ xs:sequence	Occurrence	1 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ xs:choice	Occurrence	0 .. 1	
└─ <b>QuantityValue</b>	Occurrence	1 .. 1	
	Type	QuantityValue	
└─ <b>UnitOfMeasurement</b>	Occurrence	0 .. 1	
	Type	UnitOfMeasurement	
└─ xs:sequence	Occurrence	1 .. 1	
└─ <b>UOMCoded</b>	Occurrence	1 .. 1	
	Type	xs:string	
	Description	Used code: C62	
└─ <b>UOMCodedOther</b>	Occurrence	1 .. 1	
	Type	xs:string	
	Description	not filled	
└─ xs:sequence	Occurrence	1 .. 1	
└─ <b>QuantityQualifierCoded</b>	Occurrence	1 .. 1	
	Type	xs:string	
	Description	not filled	
└─ <b>ListOfQuantityCoded</b>	Occurrence	0 .. 1	
	Type	ListOfQuantityCoded	
└─ xs:sequence	Occurrence	1 .. 1	
└─ <b>QuantityCoded</b>	Occurrence	1 .. 1	
	Type	xs:string	
└─ xs:sequence	Occurrence	1 .. 1	
└─ xs:sequence	Occurrence	1 .. 1	
└─ xs:choice	Occurrence	1 .. 1	
└─ <b>QuantityValue</b>	Occurrence	1 .. 1	
	Type	QuantityValue	
└─ <b>UnitOfMeasurement</b>	Occurrence	1 .. 1	
	Type	UnitOfMeasurement	
└─ xs:sequence	Occurrence	1 .. 1	
└─ <b>UOMCoded</b>	Occurrence	1 .. 1	
	Type	xs:string	
	Description	Used code: KG	

Bold = Element, Italic = Attribute, Grey = Group



Element/Attribute		Annotation	
	└─ <b>UOMCodedOther</b>	Occurrence	1 .. 1
		Type	xs:string
		Description	not filled
	└─ xs:sequence	Occurrence	1 .. 1
	└─ <b>QuantityQualifierCoded</b>	Occurrence	1 .. 1
		Type	xs:string
		Description	Used code: Weight
	└─ <b>LineItemNote</b>	Occurrence	0 .. 99
		Type	xs:string
		Description	May contain material short text, supplier's material number and quotation number
	└─ <b>ListOfAttachment</b>	Occurrence	1 .. 1
		Type	ListOfAttachment
	└─ xs:sequence	Occurrence	1 .. 1
	└─ <b>Attachment</b>	Occurrence	1 .. 10
	└─ xs:sequence	Occurrence	1 .. 1
	└─ <b>FileName</b>	Occurrence	0 .. 1
		Type	xs:string

Bold = Element, Italic = Attribute, Grey = Group

Components

RequestForQuotation

Element

```
graph LR
    RFQ[RequestForQuotation] -- 1..1 --> Choice
    Choice -- 1..1 --> RQH[RequestQuoteHeader]
    Choice -- 1..1 --> RQD[RequestQuoteDetail]
```

Type

RequestForQuotation

Elements

RequestQuoteHeader	Usage	M
	Description	Holds all RequestForQuotation header-level information.
RequestQuoteDetail	Usage	M
	Description	Contains the line level and packaging detail information for the RequestForQuotation.

AccountNumber

ComplexType

```
graph LR
    AN[AccountNumber] -- 1..1 --> RN[RefNum]
```

Elements

RefNum	Usage	M
	Type	xs:string
	Description	Collective number for quotations

Agency

ComplexType

```
graph LR
    A[Agency] -- 1..1 --> AC[AgencyCoded]
```

Elements

AgencyCoded	Usage	M
	Type	xs:string
	Description	Used Codes: Auftraggeber and Lieferant

BasisQuantityRange

ComplexType

```
graph LR
    BQR[BasisQuantityRange] -- 1..1 --> Choice1
    Choice1 -- 1..1 --> Choice2
    Choice1 -- 1..1 --> UOM[UnitOfMeasurement]
    Choice2 -- 0..1 --> QV[QuantityValue]
    Choice2 -- 1..1 --> QQC[QuantityQualifierCoded]
```


Elements

QuantityValue	Usage	M
	Type	QuantityValue
UnitOfMeasurement	Usage	O
	Type	UnitOfMeasurement
QuantityQualifierCoded	Usage	M
	Type	xs:string

Elements		
	Description	Used code: Weight

BuyerParty


ComplexType

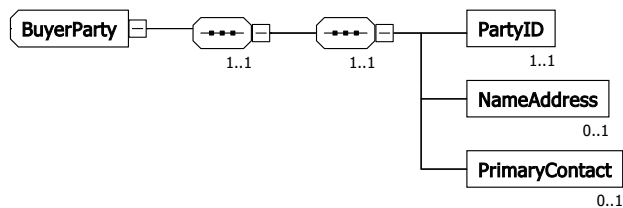

Elements		
PartyID	Usage Type	M ContractID
NameAddress	Usage Type	O NameAddress
PrimaryContact	Usage Type Description	O PrimaryContact Identifies the main contact and contact information for this party.

ContractID


ComplexType



Elements		
Agency	Usage Type	O Agency
Ident	Usage Type Description	M xs:string Holds the identification number assigned by the Buyer.

CorrespondenceLanguage


ComplexType



Elements		
LanguageCoded	Usage Type Description	M xs:string ISO 3166 2-Alpha Code

ListOfAttachment


ComplexType



Elements		
Attachment	Usage	M

ListOfQuantityCoded


ComplexType



Elements		
QuantityCoded	Usage	M

NameAddress


ComplexType



Elements		
Name1	Usage	M
	Type	xs:string
	Description	Contains the name of an entity.

OtherRequestQuoteReferences


ComplexType



Elements		
ReferenceCoded	Usage	M

PrimaryContact


ComplexType



Elements		
ContactName	Usage	M
	Type	xs:string
ListOfContactNumber	Usage	O

QuantityValue

ComplexType



TypeQuantityValue-1


QuantityValue-1


SimpleType


Typexs:decimal


QuoteCurrency


ComplexType


		
Elements		
CurrencyCoded	Usage	M
	Type	xs:string
	Description	ISO 4217 3-Alpha Code


RequestForQuotation		ComplexType
		
Elements		
RequestQuoteHeader	Usage	M
	Description	Holds all RequestForQuotation header-level information.
RequestQuoteDetail	Usage	M
	Description	Contains the line level and packaging detail information for the RequestForQuotation.


SellerPartNumber		ComplexType
		
Elements		
PartID	Usage	M
	Type	xs:string

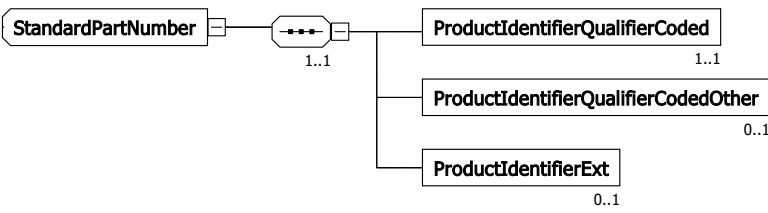StandardPartNumber		ComplexType
		
Elements		
ProductIdentifierQualifierCoded	Usage	M
	Type	xs:string
	Description	Used code: Other
ProductIdentifierQualifierCodedOther	Usage	O
	Type	xs:string
	Description	Used code: Packing
ProductIdentifierExt	Usage	O
	Type	xs:string
	Description	Package size

SubstitutePartNumbers			ComplexType
			
Elements			
ProductIdentifierCoded	Usage Type	M StandardPartNumber	

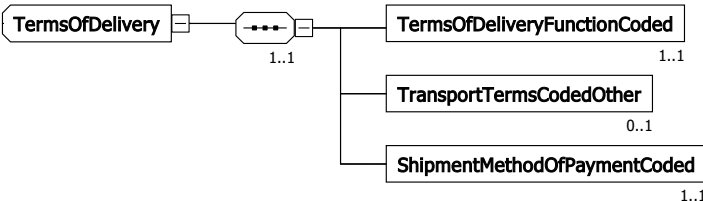TermsOfDelivery			ComplexType
			
Elements			
TermsOfDeliveryFunctionCoded	Usage Type Description	M xs:string Used code: DeliveryCondition	
TransportTermsCodedOther	Usage Type Description	O xs:string Incoterms code + text E.g. DDP Bad Mergentheim	
ShipmentMethodOfPaymentCoded	Usage Type Description	M xs:string not filled	

UnitOfMeasurement			ComplexType
			
Elements			
UOMCoded	Usage Type Description	M xs:string Used codes: C62 and KG	
UOMCodedOther	Usage Type Description	M xs:string not filled	

ValidityDates			ComplexType
			

Elements		
StartDate	Usage	M
	Type	xs:dateTime
	Description	not filled
EndDate	Usage	M
	Type	xs:dateTime
	Description	Deadline for submission of quotations.

xs:dateTime	SimpleType
-------------	------------

xs:decimal	SimpleType
------------	------------

xs:string	SimpleType
-----------	------------